



"WE MAKE THE KITCHEN BETTER!"

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois, Massachusetts, New Jersey, Ohio, Texas, Washington

Intelligent Food Safe Lockers

Locker Features

- Ideal for Delivery, To-Go and Pick up orders
- Control Panel with additional dry storage areas including: (3) small, (1) medium, (1) large. 1 control panel required per each bank of lockers.
- Control Panel consists of standard single-column configuration with 21.5" touch screen, braille keyboard & QR code scanner, LED light (top of locker), item and door detection – UL Certified. Annual software fee for control locker (messages sent and received server hosting fee)
- ETL Safety and Sanitation certified to NSF7 standard
- Patented Hybrid Cooling Technology and temperature detection
- Added counterweights are standard to ensure even distribution of weight
- Units can be used indoor or outdoor underneath a canopy.
- Freezer: (-7.6F) ~ (1.5F)
- Refrigerated/Warming/Ambient 3 - in - 1 option
- Warming modes: 122F ~ 140F
- Refrigerated mode: 33F ~ 38F
- Ambient mode: 39F ~ 60F
- Combination Units - All lockers within each section must remain one temperature.

Control Panel Features

- Rated operating voltage AC110V±10% 50Hz
- Rated power Control unit≈100W
- Electrical lock drivepower 72W duration of 0.3s
- Weight Control unit about 176lb
- Operating temperature -10°C~50°C
- Relative humidity 10% 80%RH

MODELS:

ARLA-2 / FLA-2 / PLC-3-I



For Delivery



Step 1
Create your account and login



Step 2
Choose recipients info and select box



Step 3
Delivery of the package and sends password automatically


For Pick-up



Step 1
Received SMS with password & QR Code



Step 2
Scan QR Code & Enter Password



Step 3
Get your package



1 YEAR PARTS AND LABOR WARRANTY (US ONLY)
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)





"WE MAKE THE KITCHEN BETTER!"

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,

Massachusetts, New Jersey, Ohio, Texas, Washington


SPECIFICATIONS

Models	8-Door Ambient/Refrigerated/Warming	8-Door Freezer	Control Unit
SKU No.	ARLA-2	FLA-2	Dimensions: 21.3" W * 22.8" D * 80" H (add 1.6" for adjustable feet max)
Power (AC)	115V/60Hz	115V/60Hz	
Rated Input Power (W)	630	940	
Overall Dimensions (Inch) [W*D*H]	43.3 x 23.5 x 85.4	43.3 x 23.5 x 85.4	
Box Dimensions (Inch) [W*D*H]	19 x 21.7 x 15.6	19 x 21.7 x 15.6	Software annual subscriptions includes: 1. Unlimited text messaging and emails 2. Courier/employee log in and customer retrieves package "User interface" on control locker 3. Server hosting fee included 4. Cloud admin account (remote management) 5. Software trouble shooting
Product Weight	419	419	
Cooling Method	Forced Air Cooling, Device on Top	Forced Air Cooling, Device on Top	
Refrigerant	R290	R290	
Temperature Adjustment Range	Ambient Mode 39°F-60°F Refrigerated Mode 33°F-38°F Warming Mode: 122°F - 140°F	-7.6°F-1.5°F	
Environment Temperature	32°F-110°F	14°F-110°F	
Temperature Adjustment Accuracy	34°F	34°F	
Box Temperature Difference	≤37.4°F	≤37.4°F	

PLAN VIEW

LOCKER

Stone Grey
RGB: 145,142,133

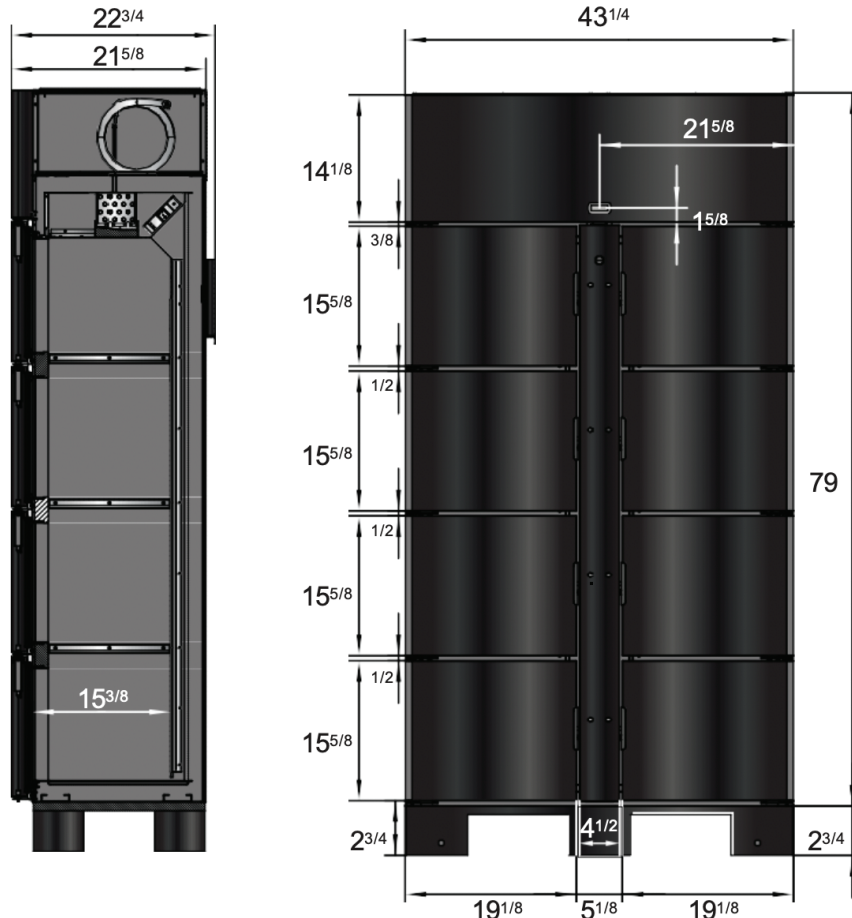

Locker Sizes (8 sections)	
No.1 (top ea.)	15-1/4" W X 15-1/4" D X 12-1/2"H
No. 2 (ea.)	15-1/4" W X 15-1/4" D X 13-1/4"H
No. 3 (ea.)	15-1/4" W X 15-1/4" D X 13-1/4"H
No. 4 (ea.)	15-1/4" W X 15-1/4" D X 12-1/2"H

CONTROL PANEL

