

# Countertop Charbroilers

## Standard Features

- Stainless steel exterior and interior
- 35,000 BTU stainless steel burners with standby pilot
- Independent manual controls every 12”
- Heavy-duty, reversible cast iron grates
- Top grates are adjustable multi-level
- Units include lava briquettes standard
- Adjustable, stainless steel legs standard
- 3/4” NPT rear gas connection and regulator standard

### MODELS:

ATCB-24 / ATCB-36 / ATCB-48

**ATCB-24**



**ATCB-36**



**ATCB-48**



1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)



Conforms to ANSI  
STD Z83.11-2009 (2011)  
Certified to CSA  
STD 1.8B-2009 (2011)  
Conforms to NSF/ANSI STD.4



**SPECIFICATIONS**


Models	Burners and Control Method	Gas Type	Intake-tube Presssure (in.W.C.)	Per BTU B.T.U./h	Total BTU B.T.U./h	Regulator	Work Area (inch)	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
ATCB-24	2 Burners, Independent Manual Control	NG	4	35,000	70,000	4" w.c.	23 <sup>9/10</sup> × 20 <sup>1/5</sup>	24 × 27 <sup>3/5</sup> × 15 <sup>1/5</sup>	137	168
ATCB-36	3 Burners, Independent Manual Control	NG	4	35,000	105,000	4" w.c.	35 <sup>7/10</sup> × 20 <sup>1/5</sup>	36 × 27 <sup>3/5</sup> × 15 <sup>1/5</sup>	191	238
ATCB-48	4 Burners, Independent Manual Control	NG	4	35,000	140,000	4" w.c.	47 <sup>9/10</sup> × 20 <sup>1/5</sup>	48 × 27 <sup>3/5</sup> × 15 <sup>1/5</sup>	248	314

**PLAN VIEW**

**ATCB-24**

**ATCB-36**

**ATCB-48**

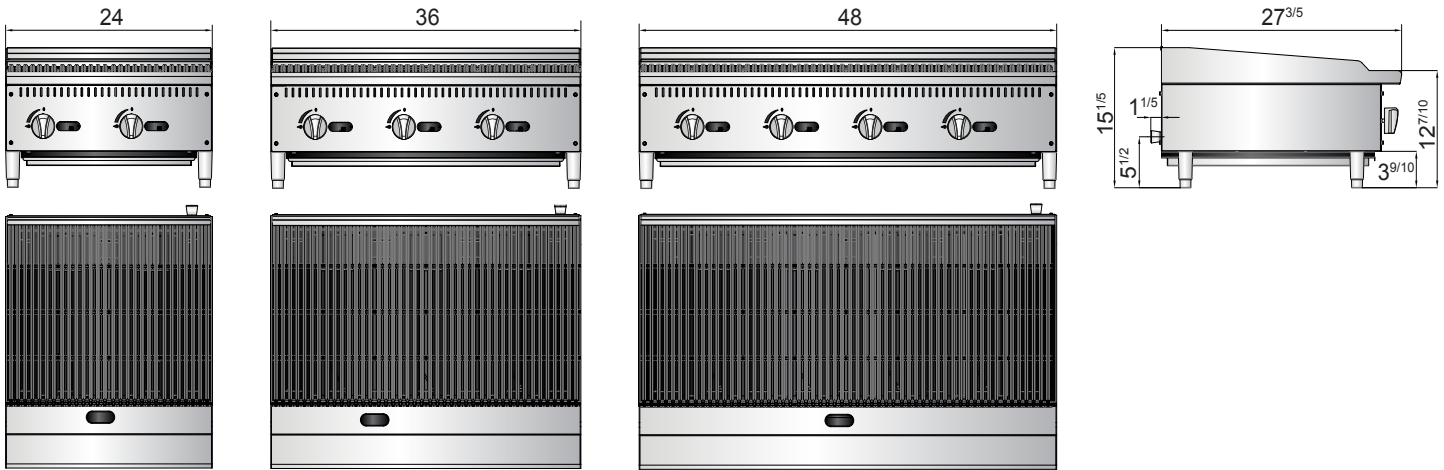

Cast iron grates    Stainless steel knobs    Dripping hole

